


# SPIRAL BEVEL GEARBOX WITH IEC MOTOR FLANGE ADAPTOR

## DIMENSIONS

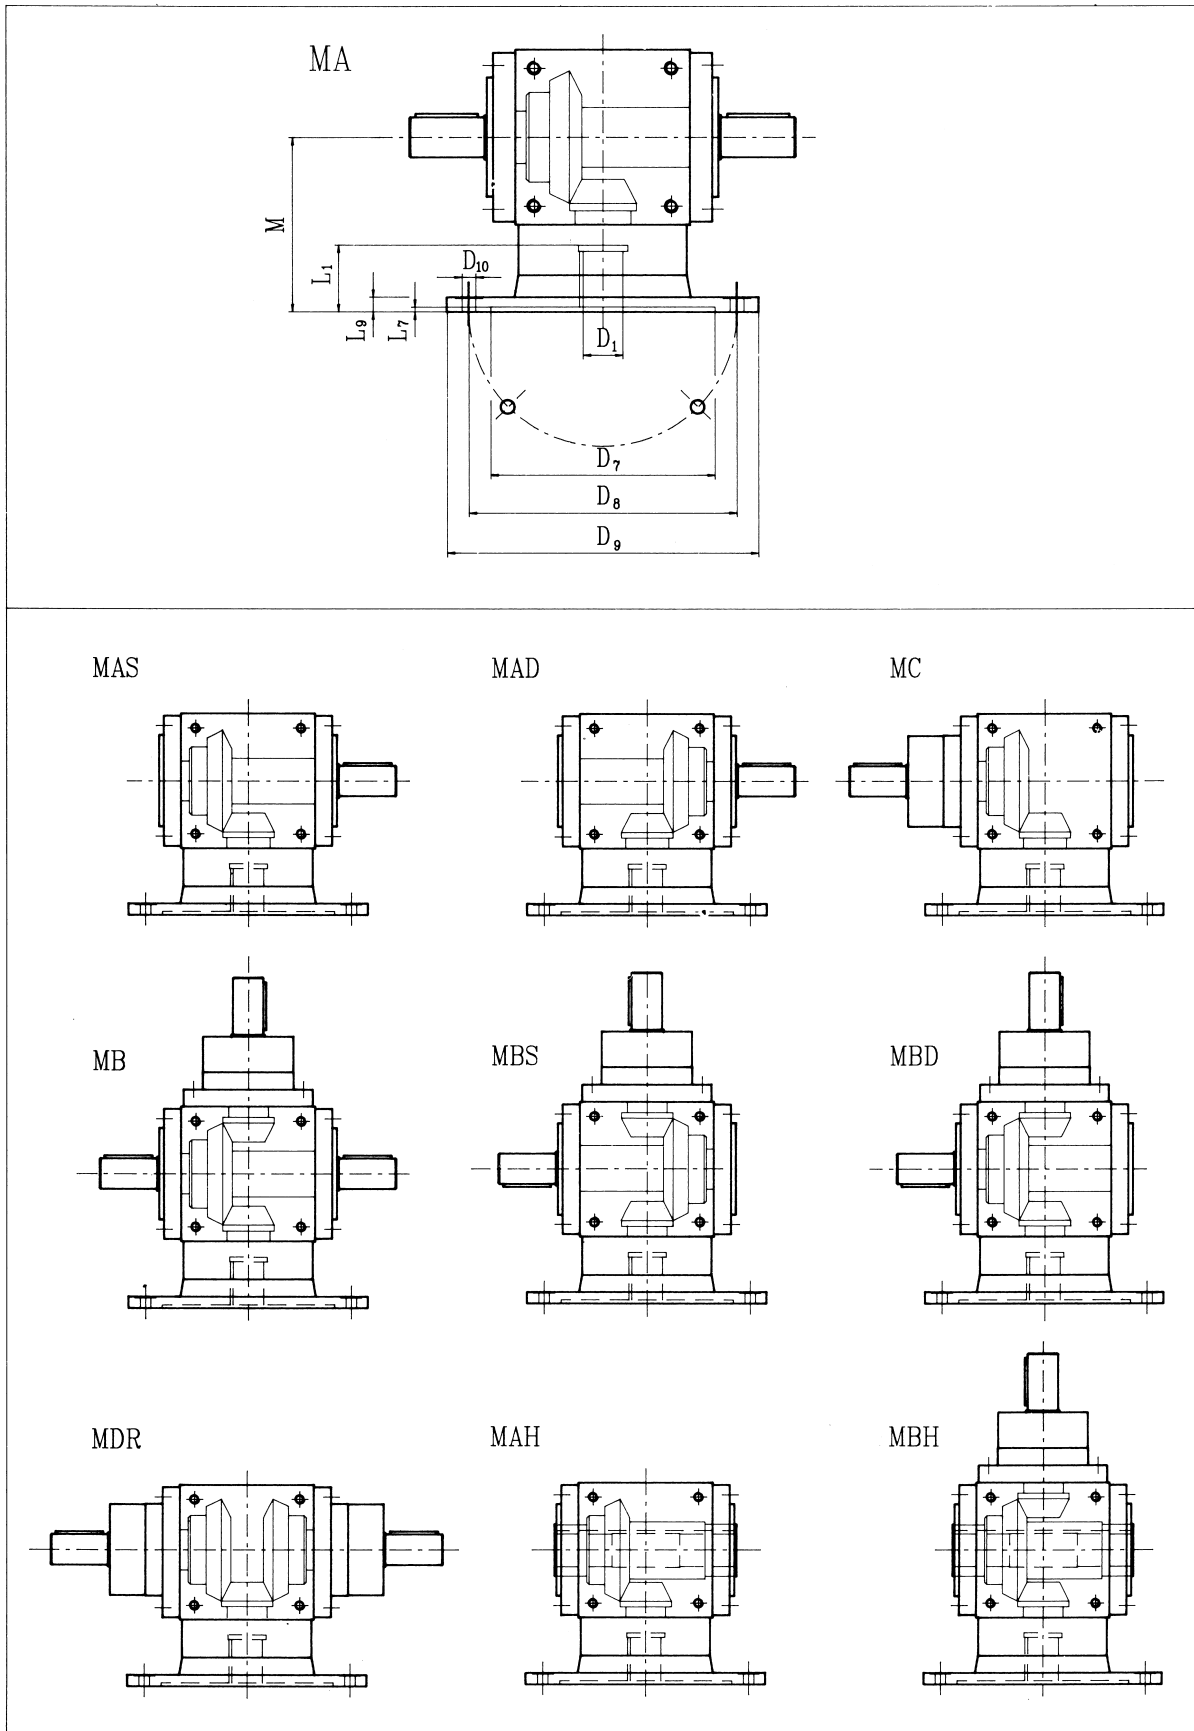

All dimensions in mm

SIZE	ratio : 1	IEC MOTOR FRAME SIZE / B5	D <sub>1</sub>	D <sub>7</sub>	D <sub>8</sub>	D <sub>9</sub>	D <sub>10</sub>	L <sub>1</sub>	L <sub>7</sub>	L <sub>9</sub>	M
BG12	1, 2, 3	63	11	95	115	140	∅9	26	4	10	90
		71 – B14	14	70	85	105	∅9	35	4	10	90
BG19	1, 2, 3 4, 5	63	11	95	115	140	M8	23	4	12	90
		71	14	110	130	160	M8	30	4	12	90
BG24	1, 2, 3	71	14	110	130	160	M8	30	4	12	120
		80	19	130	165	200	M10	40	5	12	120
		90	24	130	165	200	M10	50	5	12	120
	4, 5	71	14	110	130	160	M8	30	4	12	120
		80	19	130	165	200	M10	40	5	12	120
BG32	1, 2, 3	80	19	130	165	200	M10	40	5	15	140
		90	24	130	165	200	M10	50	5	15	140
		112	28	180	215	250	M12	60	5	15	140
	4, 5	80	19	130	165	200	M10	40	5	15	140
		90	24	130	165	200	M10	50	5	15	140
BG38	1, 2, 3	90	24	130	165	200	M10	50	5	15	155
		112	28	180	215	250	M12	60	5	15	155
		132	38	230	265	300	M12	80	5	15	155
	4, 5	90	24	130	165	200	M10	50	5	15	155
		112	28	180	215	250	M12	60	5	15	155
BG42	1, 2	112	28	180	215	250	M12	60	5	20	200
		132	38	230	265	300	M12	80	5	20	200
		160	42	250	300	350	M16	110	6	20	200
	3	112	28	180	215	250	M12	60	5	20	200
		132	38	230	265	300	M12	80	5	20	200
	4, 5	112	28	180	215	250	M12	60	5	20	200
BG55	1, 2, 3	112	28	180	215	250	M12	60	5	20	220
		132	38	230	265	300	M12	80	5	20	220
		160	42	250	300	350	M16	110	6	20	220
	4, 5	112	28	180	215	250	M12	60	5	20	220
		132	38	230	265	300	M12	80	5	20	220
BG75											

The dimensions that are not indicated and the mounting position can be taken from the tables of standard types.

All dimensions are subject to change without notice.