



Bevel gear



3 0 1 0
3 0 1 1
3 0 2 5



Description:

Gear for stepless height adjustment, mainly for manual sit/sit work stations.

Special features:

- Ratio 1 : 1 or 1,33 : 1
- Glass fibre reinforced plastic housing
- Hardened steel gear cogs
- 1200 N load
- Output spindle for push force only

Customer specific:

Because of the modular design it is possible to meet special customer requirements even for small quantities.


The gear is available in various lengths and with various mounting brackets.

Up to 4 input wheels are possible. The gear can be also driven from above.

Caution:

Please take into account that depending on the spindle pitch, the system could back-drive.

Bevel gear 3010 / 3011 / 3025

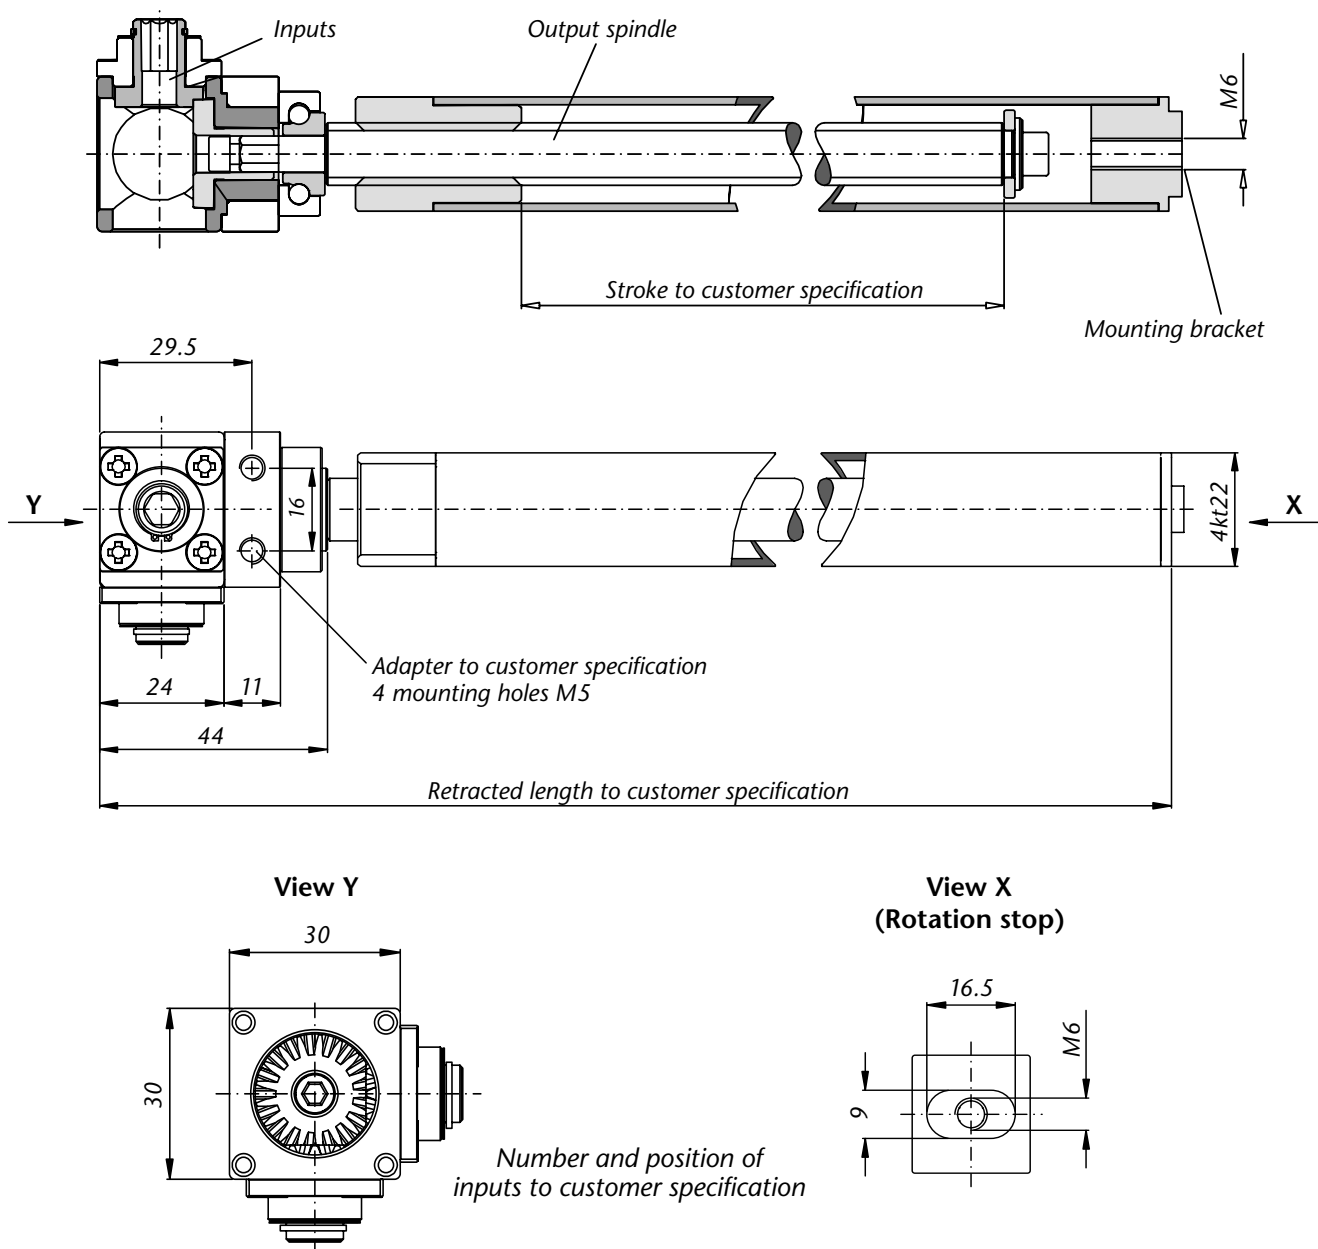

Technical Data

Model	3010	3011	3025
Ratio	1,33 : 1	1,33 : 1	1 : 1
Input in mm	hex 6mm	hex 6mm	hex 6mm
Number of inputs	max. 4	max. 4	max. 2 (facing each other)
Spindle	Tr14x3 right	Tr14x3 left	Tr14x3 right
Stroke max. in mm	retracted height -97 mm	retracted height -97 mm	retracted height -97 mm
Retracted length	customer specific	customer specific	customer specific
Load	1200 N	1200 N	1200 N
Max. torque	3 Nm	3 Nm	3 Nm



T.E.A. Machine Components Inc.

Your partner in quality engineering components since 2003

Thank you for downloading product information from TEA's wide range of engineering components.

Now, please contact us for any further information, prices and delivery.

Our contact details are:

T.E.A. Machine Components Inc.
2281-F Dabney Road
Virginia 23230
U.S.A.

Ph: +1-804-342-0004

Fax: +1-804-342-0006

Web: www.teausa.net

Email: sales@teausa.net

You are assured of prompt and efficient service at all times.